

XCF-

ALUMINUM WINGS
DIRECT DRIVE
LARGE SLEEVE
FIRE SMOKE EXHAUST
PRESSURIZING FANS
External Motor




TYPE	VOLTAGE	MOTOR POWER		CURRENT	SPEED	AIR FLOW
	V	HP	KW	(A)	d/d	m ³ /h
XCF- 35-A (5/16)	50/380	2/1	0,37	1,15	1400	4100
XCF- 40-A (5/16)	50/380	4/3	0,55	1,60	1400	5000
XCF- 45-A (5/16)	50/380	4/3	0,55	1,60	1400	6200
XCF- 50-A (5/16)	50/380	4/3	0,55	1,60	1400	7400
XCF- 50-B (5/16)	50/380	1	0,75	2,10	1400	8500
XCF- 55-A (5/16)	50/380	1	0,75	2,10	1400	10500
XCF- 55-B (5/16)	50/380	1,5	1,1	2,60	1400	12500
XCF- 60-A (5/16)	50/380	1	0,75	2,10	1400	12000
XCF- 60-B (5/16)	50/380	1,5	1,1	2,60	1400	13500
XCF- 60-C (5/16)	50/380	2	1,5	3,50	1400	14500
XCF- 60-D (5/16)	50/380	3	2,2	5,00	1400	16500

⚠ *Please contact for Ex-Proof motor or stainless steel models.

*Please contact for F300 / F400 heat resistant motors.

*Pressures are given as 0 pascal. Please contact for higher capacities.

	A Ø	B Ø	C Ø	D	H	G	E
XCF-	450	380	350	330	270	490	400
	500	430	400	370	295	540	450
	550	480	450	410	320	590	450
	600	530	500	450	345	640	450
	650	580	550	490	370	690	550
	700	630	600	530	395	740	550
	750	680	650	570	450	820	625
	800	730	700	610	475	870	625
	850	780	750	640	500	920	750
	900	830	800	680	525	970	750
	1000	930	900	910	595	1090	800
	1100	1030	1000	1010	645	1190	850
	1220	1150	1120	1135	705	1310	900
	1350	1280	1250	1270	770	1440	1000

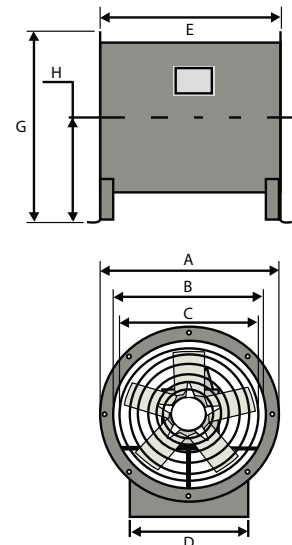

XCF-

TYPE	VOLTAGE	MOTOR POWER		CURRENT	SPEED	AIR FLOW
XCF- 65-A (5/16)	230/380/50	1,5	1,1	2,60	1400	15000
XCF- 65-B (5/16)	230/380/50	2	1,5	3,50	1400	17000
XCF- 65-C (5/16)	230/380/50	3	2,2	5,00	1400	18500
XCF- 65-D (6/20)	230/380/50	4	3	6,60	1400	20000
XCF- 70-A (5/16)	230/380/50	2	1,5	3,50	1400	19000
XCF- 70-B (5/16)	230/380/50	3	2,2	5,00	1400	20000
XCF- 70-C (6/20)	230/380/50	4	3	6,60	1400	22500
XCF- 70-D (6/20)	380/50	5,5	4	8,20	1400	23500
XCF- 75-A (5/16)	230/380/50	3	2,2	5,00	1400	23000
XCF- 75-B (6/20)	230/380/50	4	3	6,60	1400	24500
XCF- 75-C (6/20)	380/50	5,5	4	8,20	1400	26500
XCF- 75-D (5/16)	380/50	7,5	5,5	11,20	1400	28500
XCF- 80-A (6/20)	230/380/50	3	2,2	5,00	1400	29000
XCF- 80-B (6/20)	230/380/50	4	3	6,60	1400	31000
XCF- 80-C (6/20)	380/50	5,5	4	8,20	1400	32500
XCF- 80-D (6,35)	380/50	7,5	5,5	11,20	1400	35000
XCF- 80-E (6,35)	380/50	10	7,5	15,40	1400	36500
XCF- 90-A (5/35)	230/380/50	4	3	6,60	1400	37500
XCF- 90-B (5/35)	380/50	5,5	4	8,20	1400	40000
XCF- 90-C (6/35)	380/50	7,5	5,5	11,20	1400	42000
XCF- 90-D (6/35)	380/50	10	7,5	15,40	1400	43000
XCF- 90-E (7/35)	380/50	15	11	21,00	1400	46000
XCF- 100-A (6/35)	380/50	7,5	5,5	11,20	1400	47000
XCF- 100-B (6/35)	380/50	10	7,5	15,40	1400	50000
XCF- 100-C (7/35)	380/50	15	11	21,00	1400	60000
XCF- 100-D (9/35)	380/50	20	15	29,80	1400	69000
XCF- 100-E (9/35)	380/50	25	18,5	34,50	1400	74000
XCF- 112-A (6/35)	380/50	10	7,5	15,40	1400	60000
XCF- 112-B (7/35)	380/50	15	11	21,00	1400	71000
XCF- 112-C (9/35)	380/50	20	15	29,80	1400	80000
XCF- 112-D (9/35)	380/50	25	18,5	34,50	1400	90000
XCF- 112-E (9/35)	380/50	30	22	42,50	1400	100000
XCF- 125-A (7/35)	380/50	10	7,5	15,40	1400	82000
XCF- 125-B (9/35)	380/50	15	11	21,00	1400	91000
XCF- 125-C (9/35)	380/50	20	15	29,80	1400	96000
XCF- 125-D (9/35)	380/50	25	18,5	34,50	1400	102000
XCF- 125-E (9/60)	380/50	30	22	42,50	1400	115000
XCF- 130-A (9/60)	380/50	40	30	58,00	900	124000
XCF- 140-A (9/60)	380/50	50	37	67,00	900	159000
XCF- 150-A (9/60)	380/50	60	45	76,00	900	174000
XCF- 160-A (9/70)	380/50	60	45	79,00	900	189000